Digital Astronaut: Bone Remodeling Model

NA

Completed Technology Project (2011 - 2017)

Project Introduction

Background

Under the conditions of microgravity, astronauts lose bone mass at a rate of 1% to 2% a month, particularly in the lower extremities such as the proximal femur. The most commonly used countermeasure against bone loss in microgravity has been prescribed exercise. However, data has shown that existing exercise countermeasures are not as effective as desired for preventing bone loss in long duration spaceflight. This spaceflight related bone loss may cause early onset of osteoporosis to place the astronauts at greater risk of fracture later in their lives. Consequently, NASA seeks to have improved understanding of the mechanisms of bone demineralization in microgravity in order to appropriately quantify this risk, and to establish appropriate countermeasures.

In this light, NASA's Digital Astronaut Project (DAP) is working with the NASA Bone Discipline Lead to implement well-validated computational models to help predict and assess bone loss during spaceflight, and enhance exercise countermeasure development. More specifically, computational modeling is proposed as a way to augment bone research and exercise countermeasure development to target weight-bearing skeletal sites that are most susceptible to bone loss in microgravity, and thus at higher risk for fracture.

Methods

The model consists of three major research areas: (1) the orthopedic science or mechanics of the removal and replacement of bone packets via remodeling units, (2) the biology and physiology of cellular dynamics of remodeling units, and (3) mechanotransduction which describes the function of skeletal loading and its role in maintaining bone health. The basic biological assumption used in the cellular physiology can be stated as such: Cell proliferation or anti-proliferation is respectively either directly proportional or inversely proportional to receptor occupancy ratio.

In implementation, the bone remodeling model is based on a first principles physiological and mathematical description of the components of bone physiology, including responses by the endocrine, biochemical, autocrine, and paracrine systems. The model mathematically formulates the key elements based on well-accepted knowledge and experimental studies of bone. In particular, the model uses the RANK-RANKL-OPG signaling pathway to describe the cellular dynamics. For skeletal loading, the model includes the effects of nitric oxide (NO) and prostaglandin E2 (PGE2). In the computational model, reduced skeletal loading triggers a decrease in NO and PGE2, which in turn triggers an imbalance in the pathway in favor of resorption. This leads to a decrease in mineralized volume M and osteoid volume O, and hence a decrease in bone volume fraction (BVF). The loading portion of the model is based on the concept of a minimum effective strain stimulus, which takes into consideration strain rate as opposed to strain magnitude only.



Digital Astronaut: Bone Remodeling Model

Table of Contents

Project Introduction	1	
Anticipated Benefits	2	
Organizational Responsibility	2	
Project Management	2	
Technology Maturity (TRL)	2	
Primary U.S. Work Locations		
and Key Partners	3	
Project Transitions		
Technology Areas		
Target Destinations		
Stories	4	
Project Website:	5	



Digital Astronaut: Bone Remodeling Model

Completed Technology Project (2011 - 2017)



Specific Aims

- 1. For individuals in the age range of the astronaut corps, predict changes in trabecular and cortical volumetric bone mineral fraction and density as a function of time since measurement, gravity level, and applied loads
- 2. Support the bone fracture standard by accepting and providing data in the same form as that of a Quantitative Computed Tomography (QCT) scan.

Anticipated Benefits

The discoveries made through this work can have spin-off benefits to terrestrial healthcare by providing fundamental methods that can be further built upon to:

- (1) Gain further insight on the mechanisms and influence on the bone remodeling process and its implications in bone health and other health risks to patients who are bed-ridden or immobilized due to:
- * Long term illnesses; * Post-op surgery; * Limb fractures; and/or * Spinal injury, to name a few
- (2) Design exercise prescriptions for patients who have experienced bone demineralization from bed-ridden or immobilized disuse indicated in 1, in order to help them recover bone and minimize bone fracture.
- (3) Investigate the level of regular activity or exercise people should be engaged in to ensure healthy bones throughout their lives, particularly in minimizing or preventing age related osteoporosis.

Organizational Responsibility

Responsible Mission Directorate:

Space Operations Mission Directorate (SOMD)

Lead Center / Facility:

Johnson Space Center (JSC)

Responsible Program:

Human Spaceflight Capabilities

Project Management

Program Director:

David K Baumann


Project Manager:

Peter Norsk

Principal Investigator:


James A Pennline

Technology Maturity (TRL)






Digital Astronaut: Bone Remodeling Model





Primary U.S. Work Locations and Key Partners

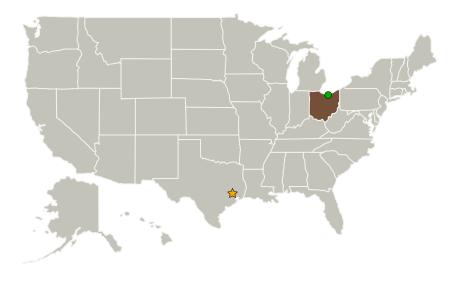

Organizations Performing Work	Role	Туре	Location
	Lead	NASA	Houston,
	Organization	Center	Texas
Glenn Research Center(GRC)	Supporting	NASA	Cleveland,
	Organization	Center	Ohio

Primary U.S. Work Locations

Ohio

Project Transitions



April 2011: Project Start

Technology Areas

Primary:

- TX06 Human Health, Life Support, and Habitation Systems
 - └ TX06.3 Human Health and Performance
 - ☐ TX06.3.6 Long Duration Health

Target Destinations

The Moon, Mars

Human Spaceflight Capabilities

Digital Astronaut: Bone Remodeling Model



Completed Technology Project (2011 - 2017)



September 2017: Closed out

Closeout Summary: The previous report detailed bone response in the femoral neck due to mechanical loading and includ ed deconditioning in the absence of skeletal loading, which was the initial work that formed the foundational model. The wo rk involved modeling exercise induced loading analogous to an equivalent amount of walking and running and was coupled with a NASTRAN finite element model of the proximal femur which averaged the stress/strain values in the femoral neck. T his allowed us to track changes in a single volumetric bone mineral density value associated with the femoral neck. The rep ort also mentioned that the work turned to extending/developing the computational model for the full proximal femur. Mod eling the full proximal femur presented a number of challenges basically because it is a much larger region but for other rea sons as well. Three major areas comprise the proximal femur, the head, trochanter, and femoral neck and structural unit (r emodeling units) dimensions can vary. There will be a much wider range of stress values from skeletal loading that would make averaging the entire proximal femur less valid than the averaging done for just the femoral neck. This prompted us t o consider modifying the finite element model to track element by element changes in the modulus values and volumetric c hanges in the bone mineral density based on stress/strain values in each element. We were unable to complete this due to mathematical difficulties. However, we were able to obtain a reference that suggests grouping elements of the finite elemen t model into 7 main areas and treating each of these as was done for the femoral neck. We could then average the 7 result s to obtain a single value for the proximal femur. It is a future idea. The newest progress in the finite element modeling is moving the development of the model from a Femap V11.1 scan to development from an actual Quantitative Computed To mography scan of a bed rest subject' hip. This makes the model more realistic since it matches scans where our data come s from. Another challenge was finding structural unit (remodeling unit) dimensions for the whole proximal femur. While sev eral references gave dimensions for the femoral neck, there does not seem to be one set of dimensions covering the whole proximal femur, or even the trochanter alone. The rib and the iliac crest are the most common skeletal sites reported in the literature because they are less invasive experimentally. We were able to find a 2009 reference that discusses the relation o f femoral osteon geometry to age, sex, height, and weight. It points toward a suitable value for osteon width in the age gro up we are interested in. Although the adaptation to the full proximal femur is a major effort, some testing of the code's abili ty to produce results close to proximal femur data was carried out. This was done by taking the femoral neck code and mak ing some minor changes. The changes included an alternate activation density, a slightly smaller cortical origination frequen cy (ages 30-50), and a slightly smaller cortical osteon width consistent with the data from a reference on the femoral neck. For a 90 day bed rest study, comparison of model prediction to experimental results showed trabecular results to be just ou tside of the standard error and cortical results to be within standard error. For a validation of the model's general trend, the code for the femoral neck model was run for a year or more to see if bone density is maintained under sufficient loading an d if bone mass is lost under insufficient loading. For maintenance, the simulation was carried out that used skeletal loading equivalent to the number of walking steps that is reported in the literature to be sufficient. The result was that there was n o change in bone mineral density over the duration of a year. Using the number of walking steps below the lower limit repo rted to be sufficient for maintenance produced results that showed a decrease in bone mineral density with a tendency tow ard a plateau. The simulation cannot continue indefinitely however, as the model will break down. Finally, a computational t ool was created that uses probabilistic machine learning techniques to build subject specific finite specific finite element mo dels of the femur. The femur models were coupled with the computational bone remodeling model to predict cortical and tr abecular vBMD of the exercisers at the end of a 70 day bed rest study. Stochastic optimization was used to predict the requ ired femoral forces required to match the bone state at the end of 70 days. Applying the tool to pre and post flight data to o btain output forces might aid in the development of customized exercise regimens. A NASA Technical Memorandum (TM) on the tool is being developed. Funding for this project has ended and work completed will be archived for future funding.

Stories

Abstracts for Journals and Proceedings (https://techport.nasa.gov/file/53495)

Abstracts for Journals and Proceedings (https://techport.nasa.gov/file/53493)



Human Spaceflight Capabilities

Digital Astronaut: Bone Remodeling Model



Completed Technology Project (2011 - 2017)

Articles in Peer-reviewed Journals (https://techport.nasa.gov/file/53496)

NASA Technical Documents (https://techport.nasa.gov/file/53498)

NASA Technical Documents (https://techport.nasa.gov/file/53499)

NASA Technical Documents (https://techport.nasa.gov/file/53497)

NASA Technical Documents (https://techport.nasa.gov/file/53500)

Papers from Meeting Proceedings (https://techport.nasa.gov/file/53501)

Project Website:

https://taskbook.nasaprs.com

